




OSD Controls for Stealth Model# SV-640 LCD

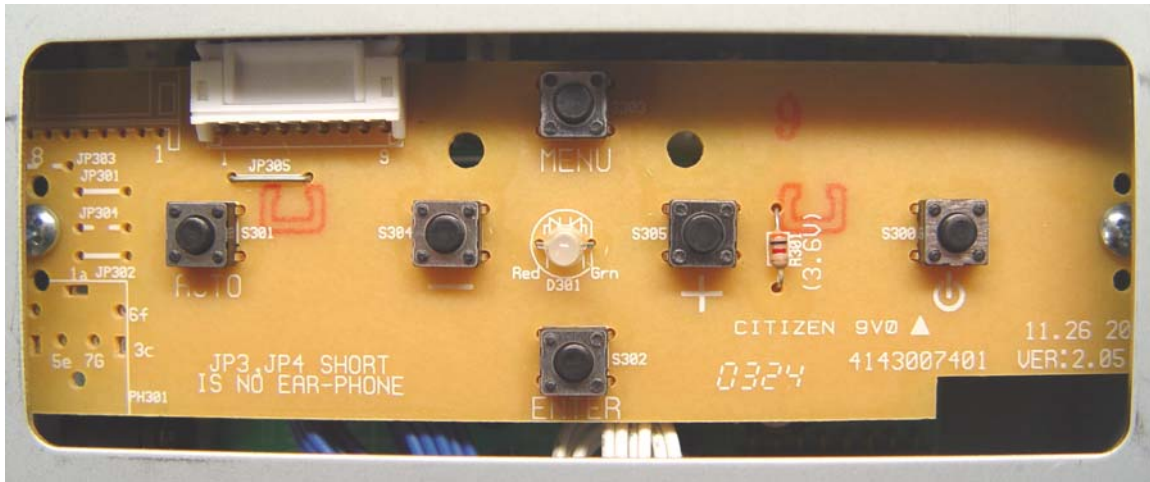

- Power on/off:** Turn on or turn off the monitor.
- +:** Go to next function/Increase the value.
- :** Go back to previous function/Decrease the value.
- Menu:** Enter the OSD Menu.
- Enter:** Enter the submenu/Save the value.
- Auto:** Automatically adjust the screen size to center.

MAIN MENU:

BRIGHTNESS: Adjusts background black level of the screen image.

CONTRAST: Adjusts foreground white level of the screen image.

LANGUAGE: Allows you to choose from English, French, German, Italian, or Spanish.

RESET: Returns all controls back to default settings.



DISPLAY ADJUST:

V. POSITION: Moves the screen image up or down.

H. POSITION: Moves the screen image left or right.

PITCH: Adjusts image distortion appearing as vertical bars or “noise” on the screen.


PHASE: Adjusts image distortion appearing as horizontal bars or “noise” on the screen.

SHARPNESS: Adjusts the clarity and focus of the screen image.

AUTO TUNING: Adjusts the picture and screen image to the best condition.

RECALL: return all controls back to default settings.

RETURN: Back to the previous menu.

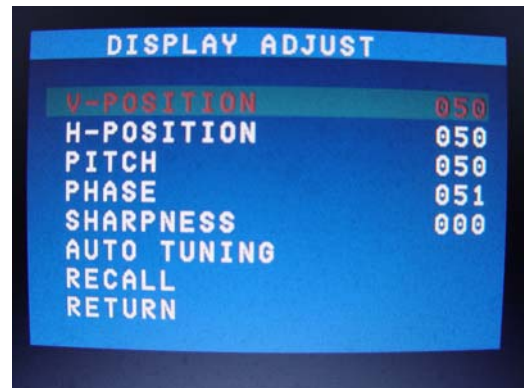

COLOR TEMPERATURE:

9300K: Cool color

7500K: Neutral Color.

6500K: Warm Color.

USER PRESET: Adjusts the color by user manually.

RECALL: return color temperature back to default settings.

RETURN: Back to the previous menu.



OSD ADJUST:

OSD H-POS: Moves the OSD screen image left or right.

OSD V-POS: Moves the screen image up or down.

OSD TIMER: Adjust the time for OSD to be appearance.

TEA TIME: Adjust the time for Break time.

RECALL: Return OSD AADJUST back to default settings.

RETURN: Back to the previous menu.

