

#### KEY SWITCH

MATERIAL: Industrial Silicone Rubber  
 LIFE: Greater Than 10 Million Cycles  
 TRAVEL: 0.055 in.  
 ACTUATION FORCE: 6.35 oz. +/- 1.06oz (180g +/- 30g)  
 FEEDBACK: Tactile with Mechanical Snap

#### POWER

PS2 or AT/Serial:  
 KEYBOARD: 50mA@5V (from Keyboard port)  
 POINTER: 35mA@5V (from Mouse port)  
 USB: 85mA@5V (from CPU port)

#### TEMPERATURE RANGE

STORAGE: -40°F to +158°F (-40°C to +70°C)  
 OPERATING: -4°F to +140°F (-20°C to +60°C)

#### HUMIDITY

100% Humidity Resistant

#### VIBRATION

POWER SPECTRAL DENSITY: .04g<sup>2</sup>/HZ  
 FREQUENCY RANGE: 20Hz-2Khz  
 DURATION OF TEST PER AXIS: 3 hours


#### SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

#### WEIGHT

2.25 lbs +/- 0.10 lbs (1.02 kg +/- 0.05 kg)

SCALE: 1:2

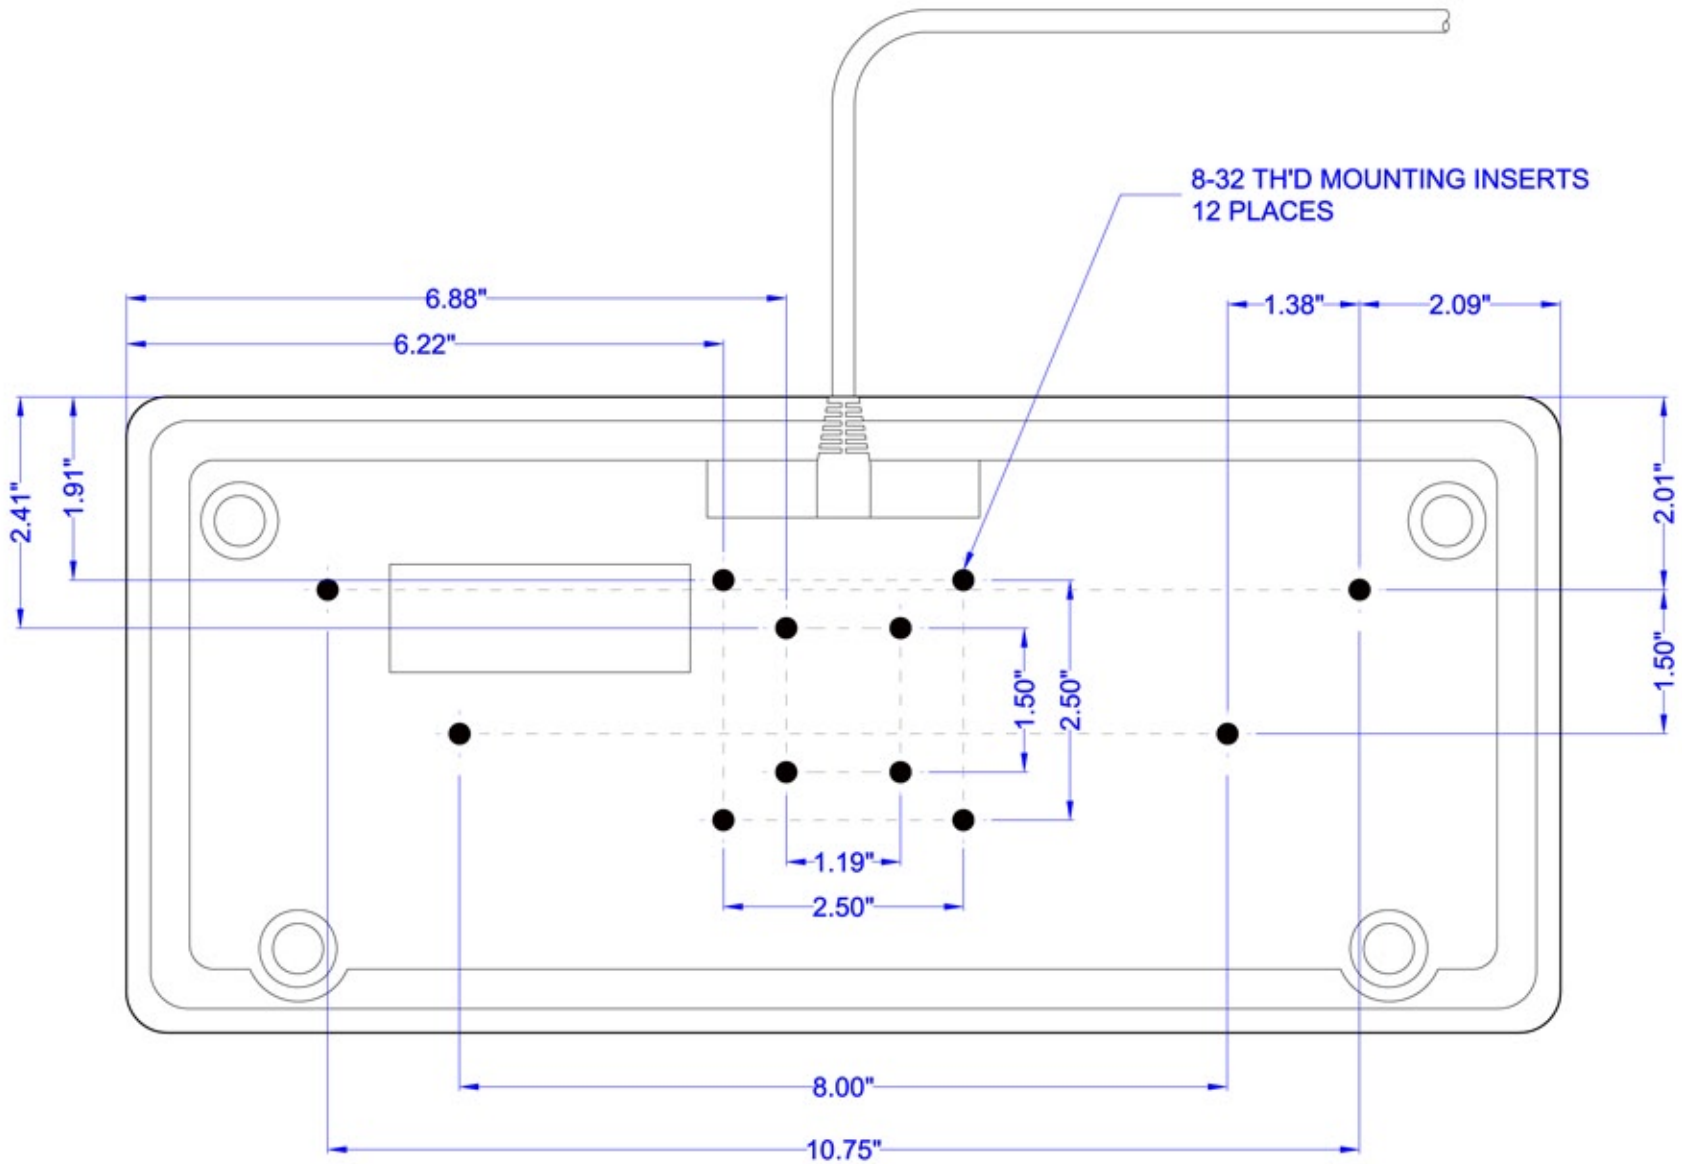

ENCLOSURE CASE: ABS/Polycarbonate

SCALE: 1:2