

**CLEARANCE MODEL: LPC-830 - RUGGED FANLESS, MINI PC WITH REMOVABLE DRIVE,
5TH GEN - CORE I5 CPU, 8GB, 480GB SSD, WIN 10**



**~~\$2,800.00 USD~~ Original price was:
~~\$2,800.00 USD~~ ~~\$2,380.00 USD~~ Current price is:
\$2,380.00 USD.**


A Powerful Versatile Fanless Solution

- No noise, Rugged Fanless Chassis
- Powerful Intel 5th Gen Core i5-5350U Mobile Processor
 - 8GB DDR3 Memory
- 480GB Solid State Drive (SSD), internal
 - 4x POE Gigabit LAN, RJ45
- 2x Gigabit LAN, USB 3.0/2.0, Audio, Serial, Video (DVI-I & Displayport)
 - 4x DIO (Digital input/output) ports
 - Removable Front Drive Bay
- Wide Range 9-48 VDC Input, ideal for mobile/field
 - Windows 10 Professional, OEM
 - CE, FCC & RoHS
 - 1 Year Warranty

15% Off



GALLERY IMAGES

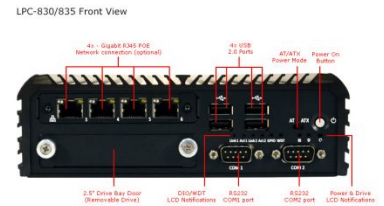

PRODUCT DESCRIPTION

Clearance Model

This model is a clearance model offered at a discounted reduced price.

If you have any specific questions about this model please contact us.

ADDITIONAL INFORMATION

Processor

Intel® 5th Gen Core™ Processor i5-5350U, Dual Core, 3MB Cache, up to 2.9 GHz

BIOS

AMI 128Mbit SPI BIOS

Chipset

SoC integrated

Memory

8GB DDR3 SO-Dimm

Internal Storage

480GB 3D NAND SSD (Solid State Drive)

Internal Expansion Option

2 Internal full sized Mini-PCIe expansion slots

Video

Integrated Intel HD Graphics 6000

Includes DVI-I & DisplayPort video ports

Triple Display support with DisplayPort and DVI-I

Max Resolution, DisplayPort Mode: 3840×2160 @ 60Hz, DVI Mode: 1920 x 1200 @ 60Hz

Communications

2x External SIM card sockets for wireless connectivity

Audio

Integrated Realtek High Definition Audio CODEC ALC888S

Operating Systems

Windows 10 (64-bit)

TPM Module

TPM 2.0 (Trusted Platform Module), provides increased hardware security.

WatchDog Timer

1 ~ 255 sec/min

System Reset

Hardware Monitor

Processor temperature

Voltage

Chassis Description

Fanless Rugged Aluminum Chassis

Input is 9V – 48V DC

Power Mode: AT & ATX

Rear Locking 3-Pin power Jack ideal for mobile applications

Includes External AC Adapter, Input 100~240V AC @ 1.4A 50-60Hz

Power Input

Power Protection: OVP (Over Voltage Protection), OCP (Over Current Protection) & Reverse Protection

Included with System

North American Power Cord
Wall Mount Bracket
* NOTE: Subject to change without notice
100-240V AC Adapter, 4.75ft cable exit length

Options

DIN Rail Mount
Remote power option Ideal for OEM or Cabinet manufacturers
External USB DVD+-RW/CD-RW Drive

Rear Panel

2x RS232 COM port
2x Gigabit RJ45 Network connection
4x DIO (Digital input/output) with Isolation
Audio Line-Out Jack
Microphone Input Jack
2 x USB 3.0 Ports
2 x USB 2.0 Ports
1x DVI-I video connector
1x DisplayPort video connector
9 – 48V DC Connector
4 x 10/100/1000 RJ45 POE Network connections
4 x USB 2.0 Ports

Front Panel

2 x RS232 COM port
AT / ATX Switch
Power-on button

Dimensions

7.28"(W) x 7.75"(D) x 2.26"(H) (185mm x 197mm x 57.4mm)

Environmental

Operating Temperature: 0 – 40C (32 to 104 F)
Relative Humidity: 10% ~ 95%, non-condensing (Operating & Non-Operating)
Shock: 50G, half sine, 11ms (with SSD)
Vibration: 5 Grms, 5 – 500 Hz, 0.5 hr/axis (with SSD)
Vibration: 1 Grms, 5 – 500 Hz, 0.5 hr/axis (with HDD)

Approvals

RoHS
CE
FCC

Weight

Unit Weight: 4.58 lbs / 2.08 KG

Warranty

1 Year Limited Warranty

Disclaimer

Note: Specifications are subject to change without notice.