



# 880-OEM-FSR-BL

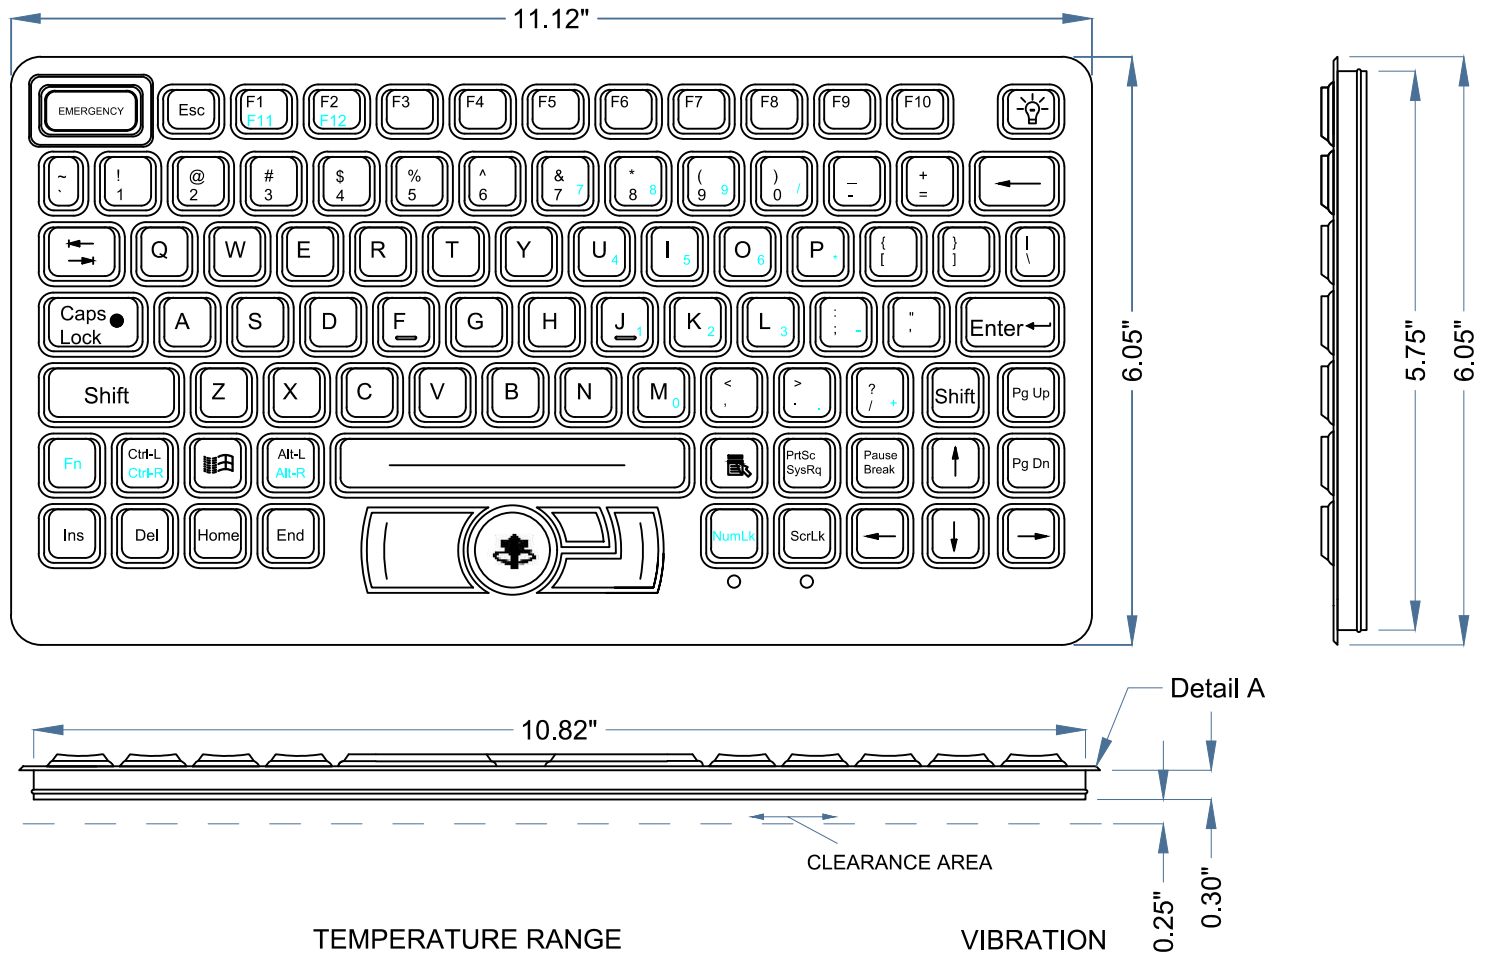

## NOTES:

1. UNIT IS MOUNTED USING RTV ADHESIVE
2. TALLEST COMPONENT EXTENDS 0.250 " INCHES BELOW KEYPAD

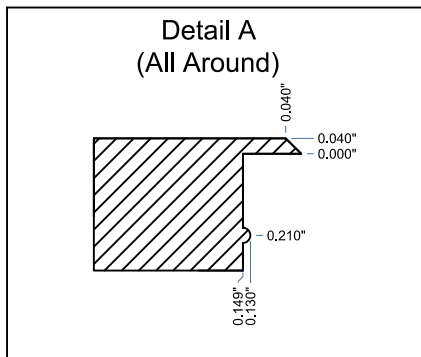

## KEY SWITCH

MATERIAL: Industrial Silicone Rubber  
 LIFE: Greater Than 10 Million Cycles  
 TRAVEL: 0.055 in.  
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)  
 FEEDBACK: Tactile with Mechanical Snap

## POWER

PS2: KEYBOARD: 35mA@5V (from Keyboard port)  
 POINTER: 5mA@5V (from Mouse port)  
 USB: 35mA@5V (from CPU port)

## TEMPERATURE RANGE

STORAGE: -40°F to +167°F (-40°C to +75°C)  
 OPERATING: -40°F to +158°F (-40°C to +70°C)

## HUMIDITY

100% Humidity Resistant

## VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ  
 FREQUENCY RANGE: 20Hz-2Khz  
 DURATION OF TEST PER AXIS: 3 hours

## SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

## WEIGHT

1.00 lbs +/- 0.10 lbs (0.45 kg +/- 0.05 kg)

# 880-OEM-FSR-BL BACK / MOUNTING

