
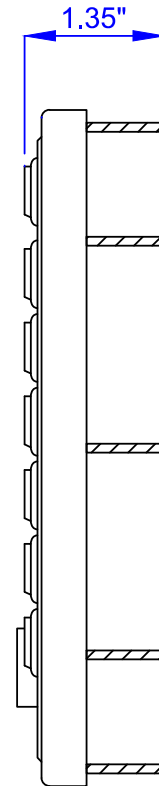


880-PM-FSR-BL

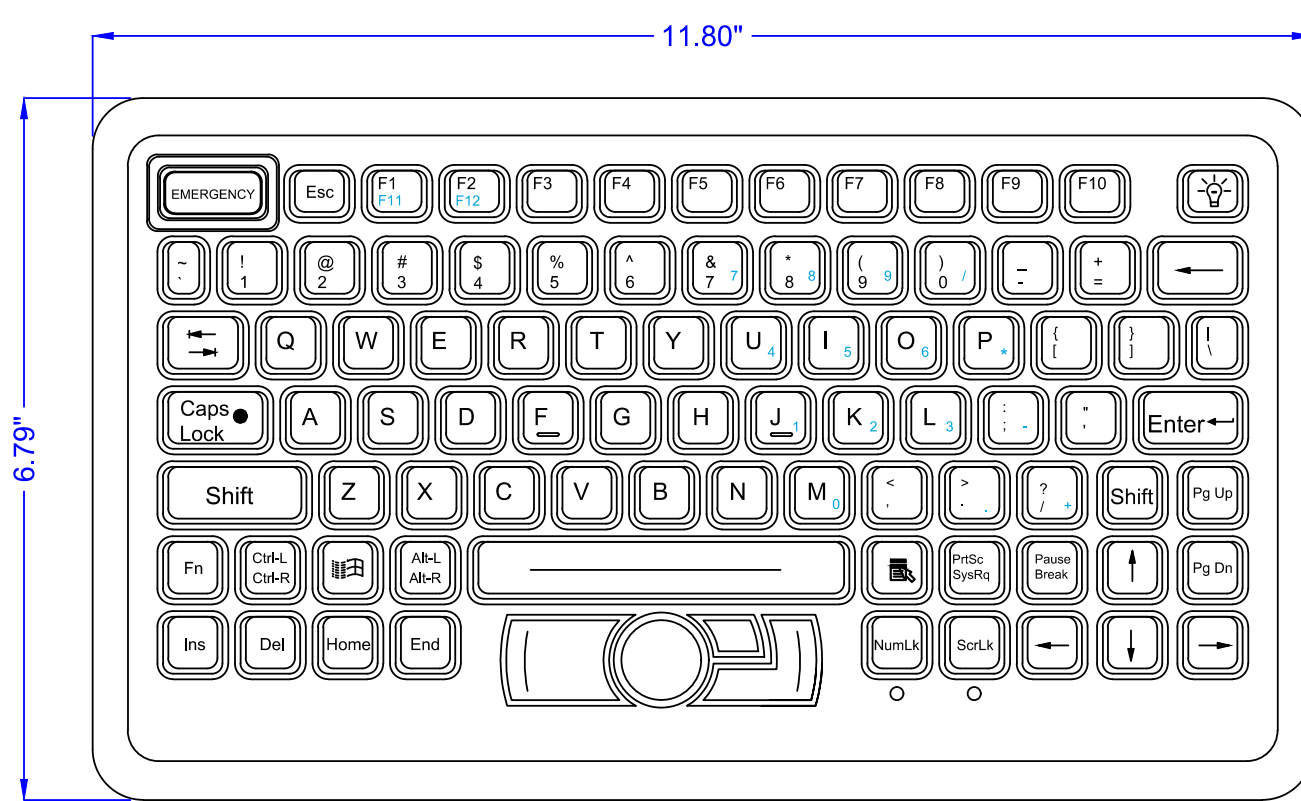

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
LIFE: Greater Than 10 Million Cycles
TRAVEL: 0.055 in.
ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
FEEDBACK: Tactile with Mechanical Snap

POWER (Maximum)

PS2: KEYBOARD: 160mA@5V (from Keyboard port)
POINTER: 55mA@5V (from Mouse port)
*PS2 current ratings valid only when both PS2 lines are connected to host
USB: 215mA@5V (from USB port)

TEMPERATURE RANGE

STORAGE: -40°F to +158°F (-40°C to +70°C)
OPERATING: -4°F to +140°F (-20°C to +60°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
FREQUENCY RANGE: 20Hz-2Khz
DURATION OF TEST PER AXIS: 3 hours


SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

1.75 lbs +/- 0.10 lbs (0.79 kg +/- 0.05 kg)

880-PM-FSR-BL BACK / MOUNTING

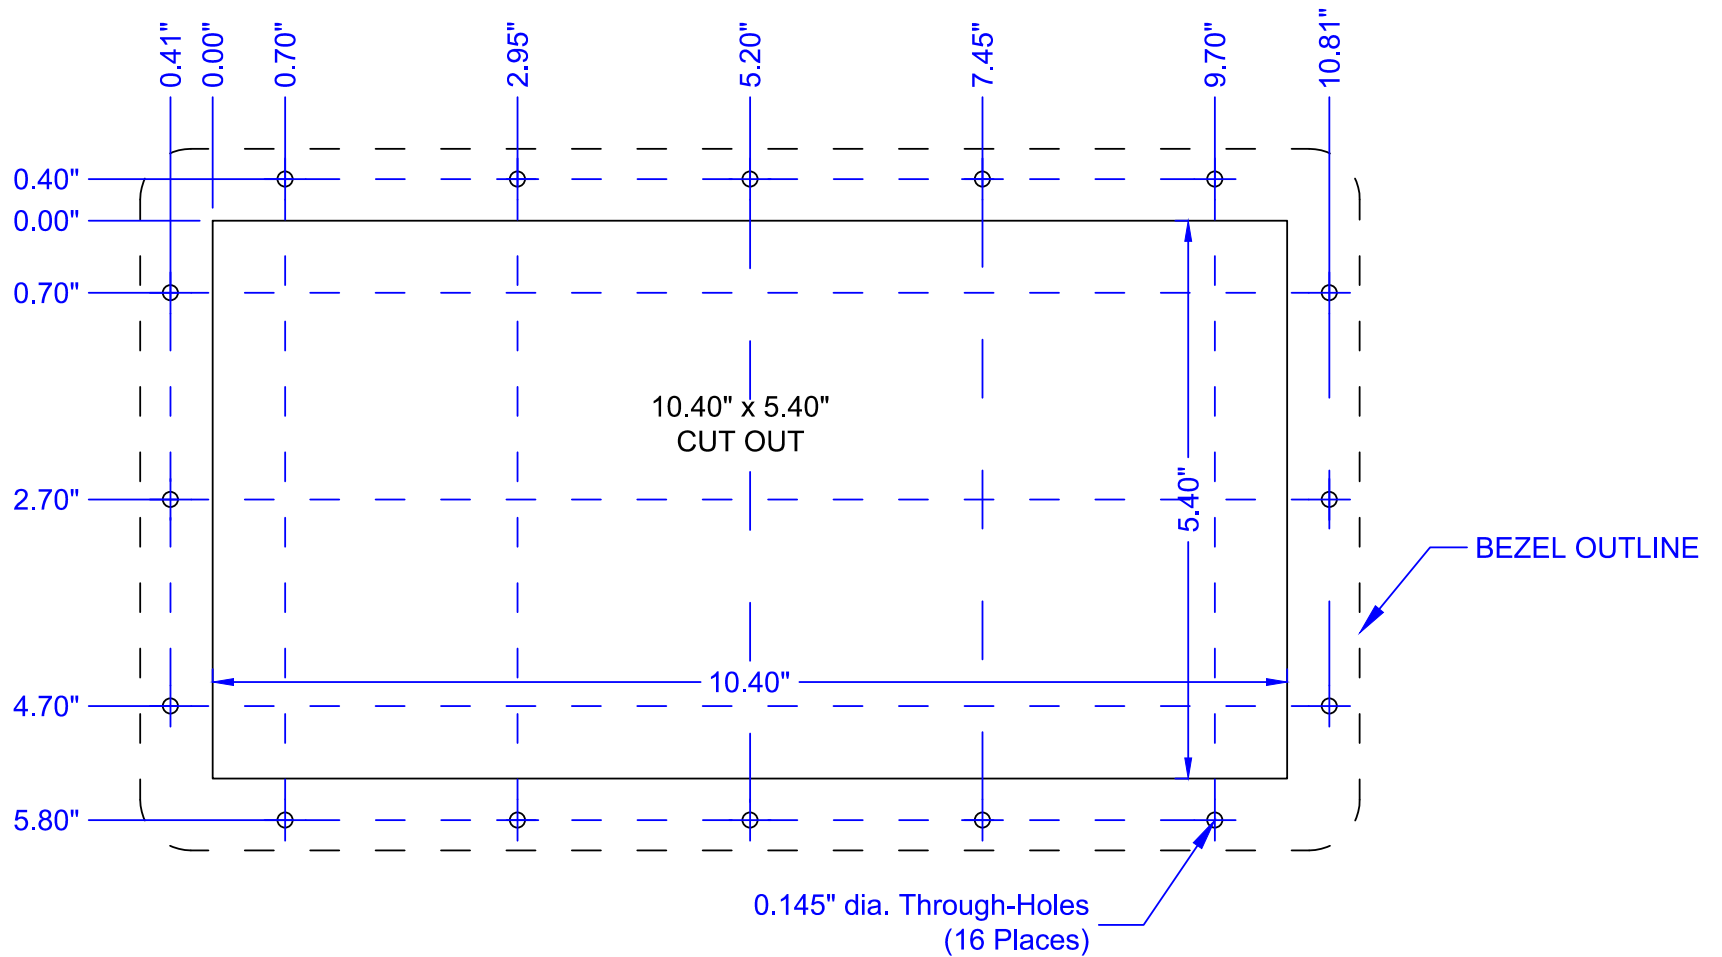

PMU BEZEL: ABS/Polycarbonate with #4-40 x 0.75" Metal Studs (16 Places)