
## TB-DT



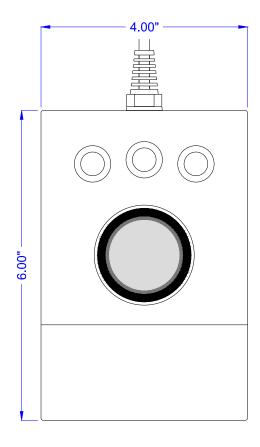

MATERIAL: Brushed Stainless Steel LIFE: Greater Than 1 Million Cycles

TRAVEL: 0.051 in.

ACTUATION FORCE: 14.00 oz. +/- 1.06oz (397g +/- 30g)

FEEDBACK: Tactile with Mechanical Snap

**POWER** 

PS2: 45mA@5V (from Mouse port) USB: 45mA@5V (from CPU port)

TEMPERATURE RANGE

STORAGE: -40°F to +185°F (-40°C to +85°C) OPERATING: 32°F to +131°F (0°C to +55°C)

HUMIDITY

100% Humidity Resistant

2.00" 1.50" --

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ FREQUENCY RANGE: 20Hz-2Khz DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

1.50 lbs +/- 0.10 lbs (0.68 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

STEALTH

Drawing #: DWG-5133 - TB-DT - Dimensional Drawing

Revision: 00 Page: 1 of 1

SCALE: 1:1,75

www.stealth.com 1-888-783-2584