

## 19" PANEL MOUNT LCD MONITOR (QUICKSHIP)




**\$1,885.00 USD**

***Model: SV-1905-PM***

- 19" Industrial Grade Panel Mount LCD Display
- Meets NEMA 4 / IP65 Environmentally Sealed
  - Resistive Touch Screen Standard
- Wide DC Input (9-36V DC) / with Mounted AC Adapter
  - Wide operating temperature (-10C - +60C)
  - 350 Nits of Brightness, Adjustable Controls
- VGA / HD15, DVI-D, and HDMI video connectors
  - 3 Year Warranty



## GALLERY IMAGES

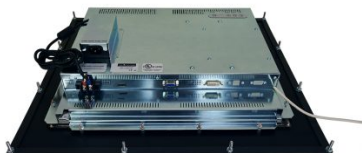

## PRODUCT DESCRIPTION

Stealth builds high quality LCD monitors suited for industrial and commercial applications. Our 19" Panel Mount LCD Monitor comes equipped with an environmentally sealed front panel that is resistant to splashes or hose downs. All Stealth Panel Mount LCD products are easily installed by securing the rear studs into your console, panel or wall.

Our LCDs are available with various Touch Screen options including Resistive or Capacitive. For non-touch applications our anti-glare protective glass overlay is installed for maximum protection.

Prior to shipping, each and every display is put through Stealth's rigorous QA burn-in procedure that is documented and controlled through our ISO 9001 quality system.

We offer Panel mount, Rack mount and Open Frame designs as standard off-the-shelf products in 8.4" up to 24" diagonal sizes. Stealth's LCD products are environmentally sealed to NEMA 4 / IP65 and are ideal for applications where dirt, dust, moisture and water are present. Stealth's rugged LCD products are constructed from solid steel and stainless steel for corrosion resistance applications.

## ADDITIONAL INFORMATION

<b>Bezel Type</b>	Panel Mount
<b>Screen Size</b>	19.0" (Diagonal)
<b>Aspect Ratio</b>	5:4
<b>Native Resolution</b>	1280 x 1024 (Auto sync from 640 x 480 to 1280 x 1024)
<b>Pixel Pitch</b>	0.294mm x 0.294mm
<b>Response Time</b>	10ms (Typical, On/Off)
<b>Type</b>	TFT Active Matrix Liquid Crystal
<b>Video Input Connectors</b>	VGA / HD-15 DVI Compliant Digital HDCP (DVI-D) HDMI
<b>Viewing Angle</b>	170° / 160° (H / V) - (Viewing angle of LCD panel without touch)
<b>Contrast Ratio</b>	1000:1 (typical)
<b>Luminance (Brightness)</b>	350 cd/m2 typical at center (350 Nits)
<b>Viewable Image Size</b>	Horizontal: 14.81" / 376.32 mm, Vertical: 11.85" / 301.06 mm
<b>Input</b>	DC Input: 9V - 36V DC AC Adapter is Removable AC Input: 100-240V, 50-60Hz, 1.5A
<b>Control Buttons (Rear mounted)</b>	Power, Left, Right, Menu
<b>Controls On-Screen Display</b>	Brightness, Contrast, Input Source, Color, Image Adjust, OSD Lockout
<b>Environmental Rating</b>	Standard Bezel: NEMA 4 / IP65 Front Panel (when properly installed) protection against windblown dust and rain, splashing water, and hose-directed water Optional Stainless Steel Bezel: NEMA 4X / IP65 Front Panel (when properly installed) corrosion protection, protection against windblown dust and rain, splashing water, and hose-directed water

## **Environmental**

Operating Temperature: -10C – +60C (14F – 140F)

Storage Temperature: -30C – +85C (-22F – +185F)

Operating: Relative Humidity 20% ~ 80%

Storage Relative Humidity: 20% ~ 80%

## **Panel Finish**

Black Baked Enamel (Standard)

Stainless Steel – Brushed #304 (Optional)

## **Unit Weight**

Unit Weight: 17.3 Lbs (7.86 Kg)\*

Shipping Weight: 23.85 Lbs (10.82 Kg)\*

\* Weight may vary depending on configuration

## **Dimensions**

Panel Mount: 21.0"(W) x 17.5"(H) x 2.56"(D) 533.4mm x 444.5mm x 65mm

## **Available Models**

SV-1905-PM-RT – Resistive Touch (Serial/DB9 and USB)

## **Warranty**

3 Year Parts and Labor

## **Disclaimer**

Note: Specifications are subject to change without notice.