

## 19" WIDESCREEN LCD MONITOR / KEYBOARD 1U RACK DRAWER WITH 8, & 16 PORT CAT6 KVM (FR-1002-19W-KVM-CAT6)




**\$2,545.00 USD**

***Model: FR-1002-19W-KVM-CAT6***

- Cat6 KVM with 8, 16 and 32 Ports
- RJ45 Interface with USB or PS/2 Dongles
- 19" Slim 1U Rack LCD / Keyboard / Mouse
- Control multiple systems from one LCD up to 120 ft or 40m away
  - 8/16/32 Keyboard/Video/Mouse Inputs
  - Easily Installs into 19" Rack Cabinets
    - Folds down to 1U, 1.75" high
  - Widescreen 1440 x 900 resolution
  - Field selectable for USB and PS/2
  - Optional DC Power, Video Inputs
    - UL Approved



## GALLERY IMAGES

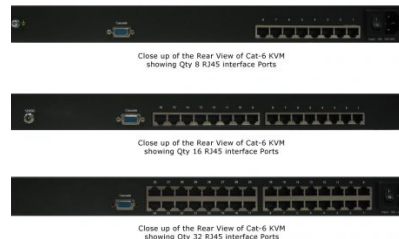

## PRODUCT DESCRIPTION

### **Manage your Rack Space with a Slim 1U All-In-One LCD/Keyboard with 8, 16 or 32 Built-in Cat6 KVM Ports with Standard RJ45 Interface Connection**

The Stealth 8, 16 and 32 Port KVM series FlatRacks present an uncomplicated way for you to manage and expand your data center efficiently. PS/2 or USB combined with VGA or DVI connections are simply plugged into a small dongle that interfaces to a CAT5/CAT6 (RJ45 Connectors) cable. This allows each installation to a host system (Computer or Server) a maximum distance of up to 120 feet or 40 meters.

Stealth's LCD products have been designed for easy installation into standard 19" rack cabinets. The high strength slide-rails have lockable fixed positions to prevent movement when typing. In its resting position the Stealth LCD monitor measure only 1.75 inches or 1U in height providing a significant cost savings by using less rack space.

Stealth's ultra-thin LCD monitors come equipped with built-in keyboard and a touch pad mouse connecting to both USB and PS/2 interfaces. Standard units ship with a built-in 110/220VAC power supply. Optional DC Power inputs of +12, +24 and -48VDC are also available. Other FlatRack models are available with a range of LCD sizes, Widescreen, and various video inputs.

**ADDITIONAL INFORMATION**

<b>Construction &amp; Design</b>	19" Rackmount steel chassis 1U , 1.75" or 44.5mm high
<b>Screen Size</b>	19.0" (Diagonal)
<b>Type</b>	LCD c/w LED Backlighting
<b>Aspect Ratio</b>	16:9
<b>Native Resolution</b>	1440 x 900 (Auto sync from 720 x 400 to 1440 x 900)
<b>Pixel Pitch</b>	0.283mm x 0.283mm
<b>Response Time</b>	5ms Typical
<b>Viewable Image Size</b>	Horizontal: 16.06" / 408 mm, Vertical: 10.03" / 255 mm
<b>Video Signal</b>	RGB Analog 0.7V Peak to Peak
<b>Video Input Connectors</b>	VGA / HD15 (Standard) DVI-D & HDMI (Optional)
<b>Viewing Angle</b>	80 (up), 80 (down), 80 (left), 80 (right)
<b>Contrast Ratio</b>	1000:1 (typical)
<b>Luminance (Brightness)</b>	250 cd/m2 typical at center (250 Nits)
<b>Controls On-Screen Display</b>	Brightness, Contrast, H/V Position, Color, Phase, Clock, Language, etc.
<b>Input</b>	Internal 100~240VAC, 50/60Hz Power Supply Power Consumption: Max. 25 Watts, Standby 4 Watts
<b>Built-in Keyboard / Mouse</b>	104 Keys 2 Button Touch Pad USB cable included
<b>Environmental</b>	Operating Relative Humidity (non condensing) 20-90% Storage Relative Humidity (non condensing) 5-90% Operating Temperature: 0~50C (32~122F) Storage Temperature: -5~60C (-23~140F) Shock: 10G acceleration (11ms duration) Vibration: 5~500Hz 1G RMS random vibration
<b>Color</b>	Black (standard)

Unit Weight	Unit Weight: 25lbs (11.5 Kgs)
Approvals	UL UL (Canada)
Available Models	FR-1002-19W-KVM8-Cat6 – 19" Widescreen LCD/Keyboard/Touchpad with 8-Port Cat6 KVM FR-1002-19W-KVM16-Cat6 – 19" Widescreen LCD/Keyboard/Touchpad with 16-Port Cat6 KVM FR-1002-19W-KVM32-Cat6 – 19" Widescreen LCD/Keyboard/Touchpad with 32-Port Cat6 KVM KVM version with 8 or 16 inputs available
Additional Options	12/24/48VDC Power supply S-Video + Composite ( BNC ) + Audio input DVI-D or HDMI Input
Dimensions	19.0"(W) x 1.75"(H) x 22.8 "(D) (482.6mm x 44.5mm x 579.1 mm)
Warranty	2 Year Parts & Labor