


OEM-114-MEM - OEM/OPEN-FRAME MEMBRANE KEYBOARD



Open-Frame Membrane Keyboard

- Meets NEMA 4, 4X / IP65 specifications when properly installed
 - Small Foot Print Design
 - Membrane style keyboard
- 114 Keys, 24 Function Keys, WIN KEY, Numeric Keypad
 - Greater than 10 Million cycles expected life
 - PS/2 or USB connectors

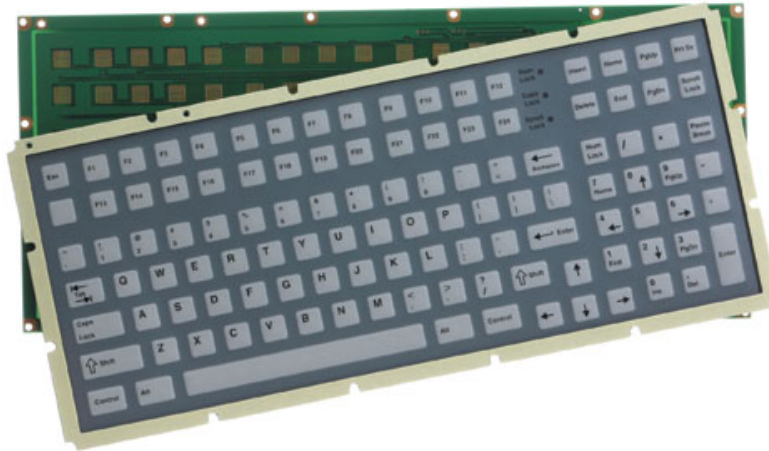

PRODUCT DESCRIPTION

The Stealth Computer model OEM-114-MEM provides a rugged, cost effective solution. It has a self-adhesive seal that offers watertight protection when installed. Each kit is comprised of an industrial silicone keypad, switch matrix board, keyboard controller and cables.

ADDITIONAL INFORMATION

Industrial Approvals

NEMA 4, 4X, IP65* when properly installed, UL/ULc 60950, CE, FCC Class 15, Part B

Key Switch

Material: Industrial Silicone Rubber

Life: Greater than 10 million cycles

Travel: 0.060" (1.5mm)

Actuation Force: 5oz (130g)

Feedback: Tactile with mechanical snap

Power

Keyboard: 5V@10ma (from CPU Port)

Temperature Range

Operating: -40C to +70C (-40F to +158F)

Storage: -40C to +90C (-40F to +194F)

Humidity

100% (when properly installed)

Shock

3x11 ms pulses of 50g on each of 3 axes

Vibration

Power Spectral Density: 0.04g/Hz, Frequency Range: 20Hz-2kHz,

Duration of Test per Axis: 3 hours

Dimensions

(W-H-D) 15.0" x 6.5" x 0.75" (381.0mm x 165.1mm x 19.1mm)

Cable

Design: 10 Feet (3.05 meters) Single 10' "Y-Split" Cable with PS/2 Connectors, or Single USB Cable

Compatibility

PS/2: All windows operating systems most Linux/Unix Systems,

USB: All windows operating systems, MAC OS and most Linux/Unix Systems

Additional Options

Custom cable lengths, special connectors, custom enclosures etc

Other Languages Available - Contact us for more details,

Minimum quantities may apply.

Warranty

1 Year limited Warranty Standard

Model Numbers

OEM-114-MEM-USB (USB Interface)

OEM-114-MEM-PS/2 (PS/2 Interface)

Disclaimer

Note: Specifications are subject to change without notice.