


1330-FTM-OEM - OEM/OPEN-FRAME POINTING DEVICE

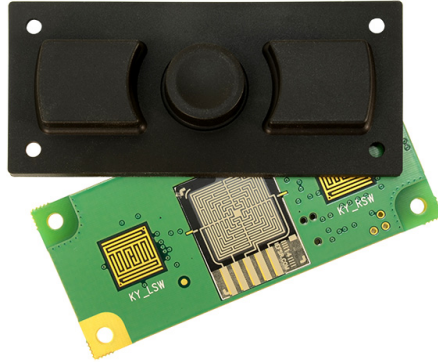

\$169.00 USD

Small, Open-Frame Mouse

- Meets NEMA 4, 4X / IP65 specifications when properly installed
- Two-button OEM/Open-Frame FingerTipMouse pointing device in a compact design
 - Built-in 3 button FingerTipMouse (Pointing Device)
 - 10 Million cycles expected life
 - Ideal for Kiosk Applications
 - Includes 10' cable PS/2 or USB interface



PRODUCT DESCRIPTION

The Stealth Computer model 1330-FTM-OEM is a smaller version of our regular FingerTipMouse pointing device. The two-button device offers the versatility and convenience of the FingerTipMouse pointing device but in a compact version to suit a variety of applications including industrial environments.

The 1330-FTM-OEM when properly installed is dustproof, waterproof, and non-corrosive.

Stealth has a wide variety of rugged industrial keyboards & pointing devices and have been designed for use in a multitude of applications including HMI, operator interface, shop floor, data acquisition, kiosks, medical carts, mobile mount, and outdoor use to name a few.

ADDITIONAL INFORMATION

Industrial Approvals

NEMA 4, 4X, IP65* when properly installed, UL/ULc 60950, CE, FCC Class 15, Part B

* Proper instructions must be followed to create a water-tight seal (NEMA 4X / IP65)

Key Switch

Actuation Force: 7oz (200g)

Material: Industrial Silicone Rubber

Life: Greater than 10 million cycles

Travel: 0.055" (1.4mm)

Feedback: Tactile with mechanical snap

Power

PS/2: 35mA @ 5V (from mouse Port)

USB: 35mA @5V (from USB port)

Temperature Range

Operating: -40C to +70C (-40F to +158F)

Storage: -40C to +90C (-40F to +194F)

Humidity

100% Humidity Resistant when properly installed

Shock

3×11 ms pulses of 50g on each of 3 axes

Vibration

Power Spectral Density: 0.04g/Hz, Frequency Range: 20Hz-2kHz,

Duration of Test per Axis: 3 hours

Dimensions

(W-H-D) 3.10" x 1.40" x 0.45" (78.7mm x 35.6mm x 11.4mm)

Cable

Length: 10 feet (3.94 meters), Interface: Either PS/2 or USB single connection

Compatibility

PS/2: All windows operating systems most Linux/Unix Systems,

USB: All windows operating systems, MAC OS and most Linux/Unix Systems

Warranty

1 Year limited Warranty Standard

Model Numbers

1330-FTM-OEM-USB (USB Interface)

1330-FTM-OEM-PS/2 (PS/2 Interface)

Disclaimer

Note: Specifications are subject to change without notice.