

## 20" LCD MONITOR / KEYBOARD 1U RACK DRAWER WITH 8, 16 & 32 PORT CAT6 KVM (DISCONTINUED)



**\$2,595.00 USD**


***Model: FR-1001-20-KVM-Cat6***

- Cat6 KVM with 8, 16 and 32 Ports
- RJ45 Interface with USB or PS/2 Dongles
- 20" Slim 1U Rack LCD / Keyboard / Mouse
- Control multiple systems from one LCD up to 120 ft or 40m away
- 8/16/32 Keyboard/Video/Mouse Inputs
- Easily Installs into 19" Rack Cabinets
  - Folds down to 1U, 1.75" high
- Field selectable for USB and PS/2
  - 1600 x 1200 resolution
- Built-in lockable Slide Rails
- Optional DC Power, Video Inputs

**The model FR-1001-20-KVM-Cat6 is now End-of-Life, if you have a requirement please contact us or see our current lineup of 1U & 2U Rack LCD / Keyboard Drawers.**



## GALLERY IMAGES

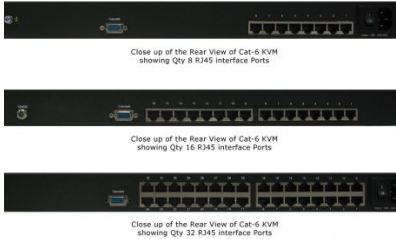

## PRODUCT DESCRIPTION

### **Manage your Rack Space with a Slim 1U All-In-One LCD/Keyboard with 8, 16 or 32 Built-in Cat6 KVM Ports with Standard RJ45 Interface Connection**

The Stealth 8, 16 and 32 Port KVM series FlatRacks present an uncomplicated way for you to manage and expand your data center efficiently. PS/2 or USB combined with VGA or DVI connections are simply plugged into a small dongle that interfaces to a CAT5/CAT6 (RJ45 Connectors) cable. This allows each installation to a host system (Computer or Server) a maximum distance of up to 120 feet or 40 meters.

Stealth's LCD products have been designed for easy installation into standard 19" rack cabinets. The high strength slide-rails have lockable fixed positions to prevent movement when typing. In its resting position the Stealth LCD monitor measure only 1.75 inches or 1U in height providing a significant cost savings by using less rack space.

Stealth's ultra-thin LCD monitors come equipped with built-in keyboard and a track pad mouse connecting to both USB and PS/2 interfaces. Standard units ship with a built-in 110/220VAC power supply. Optional DC Power inputs of +12, +24 and -48VDC are also available. Other FlatRack models are available with a range of LCD sizes, Widescreen, and various video inputs.

**ADDITIONAL INFORMATION****Construction & Design**

19" Rackmount steel chassis  
1U , 1.75" or 44.5mm high  
Latching front panel w/ 2-point lock

**Screen Size**

20.0" (Diagonal)

**Type**

TFT Active Matrix Liquid Crystal

**Aspect Ratio**

4:3

**Native Resolution**

1600 x 1200 (Auto sync from 640 x 480 to 1600 x 1200)

**Response Time**

1ms Typical

**Viewable Image Size**

Horizontal: 16.06" / 408 mm, Vertical: 12.04" / 306 mm

**Video Signal**

RGB Analog 0.7V Peak to Peak

**Video Input Connectors**

VGA / HD15 (Standard)  
DVI-D & HDMI (Optional)

**Viewing Angle**

80 (up), 80 (down), 80 (left), 80 (right)

**Contrast Ratio**

800:1 (typical)

**Luminance (Brightness)**

300 cd/m2 typical at center (300 Nits)

**Controls On-Screen Display**

Brightness, Contrast, H/V Position, Color, Phase, Clock, Language, etc.

**Input**

Internal 100~240VAC, 50/60Hz Power Supply  
Power Consumption: Max. 48 Watts, Standby 5 Watts

**Built-in Keyboard / Mouse**

104 Keys  
2 Button Touch Pad  
PS/2 and USB Combo cables included

**Environmental**

Operating Relative Humidity (non condensing) 20-90%  
Storage Relative Humidity (non condensing) 5-90%  
Operating Temperature: 0~50C (32~122F)  
Storage Temperature: -5~60C (-23~140F)  
Shock: 10G acceleration (11ms duration)  
Vibration: 5~500Hz 1G RMS random vibration

**Color**

Black (standard)

**Unit Weight**

Unit Weight: 44lbs (20.0 Kgs)

**Available Models**

FR-1001-20-KVM8-Cat6 – 20" LCD/Keyboard/Trackpad with 8-Port Cat6 KVM  
FR-1001-20-KVM16-Cat6 – 20" LCD/Keyboard/Trackpad with 16-Port Cat6 KVM  
FR-1001-20-KVM32-Cat6 – 20" LCD/Keyboard/Trackpad with 32-Port Cat6 KVM

**Additional Options**

KVM version with 8 or 16 inputs available  
12/24/48VDC Power supply  
DVI-D, BNC, S-Video, RCA Inputs

**Dimensions**

19.0"(W) x 1.75"(H) x 25.6"(D) (482.6mm x 44.5mm x 650 mm)

**Warranty**

2 Year Parts & Labor