


8 & 16 PORT RJ45 KVM SWITCH - SK-300 (DISCONTINUED)

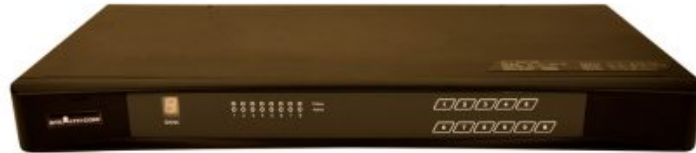

Model: SK-300

- KVM Switch with 8 or 16 RJ45 Ports
- Control multiple systems from one point
- Hot Pluggable, no need to power down
- Support resolutions up to 1920 x 1200
 - Slim 1U size, 1.75" high
 - Easily Installs into 19" Rack Cabinets
- OS Support: Windows / Linux / Unix / Mac OS
 - Optional 12/24/48/125/250V DC power
 - Optional Remote IP connectivity

The model SK-300 is now end of life, if you still have a requirement please contact us.



GALLERY IMAGES



PRODUCT DESCRIPTION

Manage your Rack Space with 8 or 16 Ports KVM Switch

The Stealth SK-300 KVM Switch has a slim 1U form factor to help administrators manage, expand, control, and simplify your data center while being cost efficient. Control up to 16 Computers or Servers from a single Keyboard, Video and Mouse (KVM) console.

To simplify switching and control, the SK-300 is equipped with an OSD (On-Screen-Display) menu and ability to switch targets via a Hot Key sequences. The SK-300 series supports up to 1920 x 1200 resolution and is Hot Pluggable - Add PCs or remove connected PCs for maintenance without powering down the USB KVM switch or PCs. Through the use of the RJ45 connections you can easily change the interface type and not be bound by traditional cable limits. Further being able to control your devices remotely through our Remote IP connectivity - no longer bound to being onsite to see the traditional console of your servers.

The KVM Switch measures only 1.75 inches or 1U in height providing a significant cost savings by using less rack space.

Optional DC Power inputs of 12/24/48/125/250V are configurable for your custom solution. Also available as an option, Remote IP connectivity, easily access your KVM from from any location.

Stealth also provides additional KVM & Cat6 KVM Drawers with a range of LCD sizes, Widescreen, and various video inputs.

ADDITIONAL INFORMATION

| | |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| KVM Specification | Connectivity: Cat6 RJ45 Cable, 131 feet (40 metres) with DisplayPort/HDMI/DVI/VGA dongle options 8 or 16 Ports |
| Construction & Design | 1U , 1.75" or 44.5mm high |
| Native Resolution | 16:10 Aspect Ratio - Max. 1920 x 1200 4:3 Aspect Ratio - Max. 1600 x 1200 |
| Controls On-Screen Display | Language, Hotkey, Security |
| Input | Power Consumption: Max. 10W |
| Environmental | Operating Temperature: 0~55C (32~131F) Operating Relative Humidity (non condensing) 20-90% Storage Relative Humidity (non condensing) 5-90% Operating Temperature: 0~50C (32~122F) Storage Temperature: -20~60C (-4~140F) Shock: 10G acceleration (11ms duration) Vibration: 5~500Hz 1G RMS random vibration |
| Color | Black (standard) |
| Unit Weight | 6.5 lbs / 3 kg |
| Available Models | SK-308-* SK-308-IP-* SK-316-* SK-316-IP-* * Denotes Power options: AC, 12V, 24V, 48V, 125V, and 250V |
| Additional Options | Optical DC Power Input - 12V (9-18), 24V (18-36), 48V (36-75), 125V (66-160), 250V (180-425) Remote Networking Connectivity |
| Dimensions | 17.4"(W) x 10.7"(D) x 1.73"(H) / (443 x 271 x 44 mm) |
| Warranty | 2 Year limited Warranty, Standard |