


21.5" MULTI-TOUCH PANEL MOUNT LCD MONITOR (DISCONTINUED)

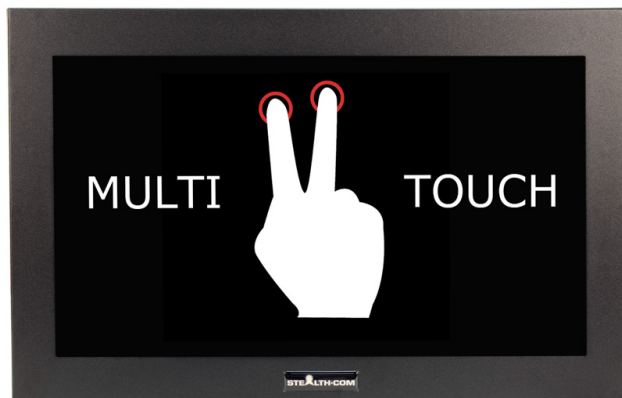

Model: SV-2150AW-PM-PT-USB

- Panel Mount 21.5" Widescreen LCD Monitor
 - NEMA 4 Environmentally Sealed
- Multi-Touch (PCT / PCAP) Touchscreen, USB Interface, 2 Point Touch
 - PIP (Picture-In-Picture)
 - 16:9 Aspect Ratio
- 1920 x 1080 Maximum Resolution
 - 300 Nits of Brightness
 - Wide Viewing Angles
- VGA/HD15, DVI-D, Composite & S-Video connectors
 - 2 Year Warranty

This product has been discontinued, if you are still interested in this product and have a requirement please contact us.



GALLERY IMAGES



PRODUCT DESCRIPTION

Stealth's 21.5" Multi-Touch Panel Mount LCD Monitor features Projected Capacitive (PCAP) Touchscreen, the same technology found in smart phones and tablets but equipped for your industrial application. The Stealth model SV-2150AW-PM-PT-USB easily integrates into your enclosure, cabinet, console, wall, kiosks or other applications.

Using Projected Capacitive touchscreen technology (PCAP) allows for a modern user interface thereby making use of new and extended ways of user input and control. Gesture-based interactions by touching and pointing, with one finger or more, rotate, pinch to zoom and move objects on the display.

All Stealth Panel Mount LCD products come standard with an environmentally sealed NEMA 4 front panel that is resistant to dust/dirt penetration or even liquid splashes. The SV-2150AW-PM-PT-USB also features a 1920 x 1080 Maximum Resolution (Full HD 1080p), PIP (Picture-In-Picture) capability and VGA, DVI-D, Composite & S-Video connectors.

Stealth offers a wide range of LCD product offerings that include Panel mount, Rack mount and Open Frame designs as standard off-the-shelf products in 8.4" up to 26" diagonal sizes. Our LCD products are constructed from solid steel and will meet the demands of your application without breaking your budget.

ADDITIONAL INFORMATION

Bezel Type	Panel Mount
Screen Size	21.5" (Diagonal)
Aspect Ratio	16:9
Native Resolution	1920 x 1080 (Auto sync from 640 x 480 to 1920 x 1080)
Horizontal Frequency	31.5 kHz ~ 80 kHz
Vertical Frequency	60 Hz ~ 76 Hz
Response Time	25ms
Type	LCD c/w LED Backlighting
Video Input Connectors	VGA / HD-15
	DVI Compliant Digital HDCP (DVI-D)
	Composite
	S-video
Viewing Angle	178° / 178° (H / V) – (Viewing angle of LCD panel sans touch)
Contrast Ratio	5000:1 (typical)
Luminance (Brightness)	300 cd/m2 typical at center (300 Nits)
Viewable Image Size	Horizontal: 18.77" / 476.64mm, Vertical: 10.56" / 268.11mm
Video Signal	ANALOG: 0.7 Vp-p/75 Ohms
Sync Signal	Horizontal Sync: Positive/Negative
	Vertical Sync: Positive/Negative
	Composite Sync: Positive/Negative
	Standard Bezel: NEMA 4 Front Panel (when properly installed)
Environmental Rating	protection against windblown dust and rain, splashing water, and hose-directed water
	Operating Temperature: 0~50C (32~122F)
	Storage Temperature: -20 to 70C (-20 to 158F)
	Operating Humidity: 10 to 90% (non-condensing)
Environmental	Storage Humidity: 10 to 90% (non-condensing)
	Operating Altitude: 0 to 12,000 ft.
	Storage Altitude: 0 to 40,000 ft.

Shock	30g's, 11ms, ½ Sine
Vibration	1g RMS, 20-500Hz
Input	90-264VAC, 47-63Hz internal Power Supply, Auto-switching Main Power switch 2A field replaceable fuse
Cooling Fans	Single rear mounted intake cooling fan with dust filter
Control Buttons (Rear mounted)	Power, Menu/OK, Check(Exit), Up and Down
Controls On-Screen Display	Image Select, Image Adjustment, Color Adjustments, Video Settings, Scaling Adjustment, System Settings
Picture In Picture Options (PiP)	Small, Medium, Large, Side by Side
Panel Finish	Black Front Panel Finish
Unit Weight	Unit Weight: 17.55lbs (7.96Kg)
Dimensions	Unit: 22.05" (W) x 14.04" (H) x 2.50" (D) (560.01mm x 356.61mm x 63.50mm) Cutout: 21.22" (W) x 13.11" (H) (539mm x 333mm)
Available Models	SV-2150AW-PM-PT-USB – Multi-Touch (PCT / PCAP) Touchscreen with USB Interface
Warranty	2 Year Parts & Labor
Disclaimer	Note: Specifications are subject to change without notice.