


## 1330-FTM-PM - PANELMOUNT POINTING DEVICE

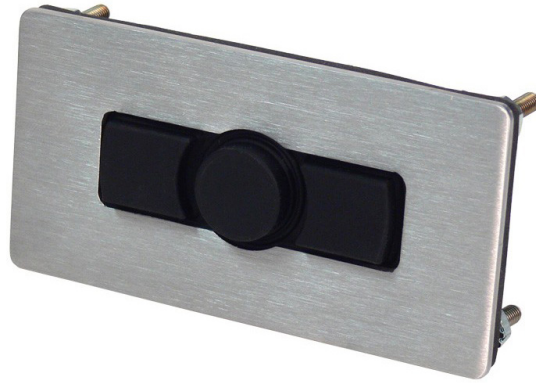

**\$349.00 USD**

### ***Small Industrial Panel Mount Mouse***

- Meets NEMA 4, 4X / IP65 specifications when properly installed
  - Stainless Steel Panel Mount front bezel
- Two-button FingerTipMouse pointing device in a compact design
  - 10 Million cycles expected life
  - Ideal for Kiosk Applications
- Includes 10' cable PS/2 or USB interface



## GALLERY IMAGES



## PRODUCT DESCRIPTION

The Stealth Computer Model 1330-FTM-PM is an environmentally sealed, industrial grade pointing device that combines the functionality of a mouse and the flexibility of a joystick in one convenient, small-footprint package.

The completely sealed, NEMA 4, 4X / IP65 design (when properly installed) is constructed from solid stainless steel and withstands spills, washdowns, contaminants, and the general rigors of an industrial environment. Ideal for kiosks, control panels, machines, Instrumentation or other applications.

Stealth has a wide variety of rugged industrial keyboards & pointing devices and have been designed for use in a multitude of applications including HMI, operator interface, shop floor, data acquisition, kiosks, medical carts, mobile mount, and outdoor use to name a few.

## ADDITIONAL INFORMATION

### Industrial Approvals

NEMA 4, 4X, IP65\* when properly installed, UL/ULc 60950, CE, FCC Class 15, Part B

### Key Switch

Material: Industrial Silicone Rubber

Life: Greater than 10 million cycles

Travel: 0.055" (1.4mm)

Actuation Force: 6.35oz +/- 1.06oz (180g+/-30g)

Feedback: Tactile with mechanical snap

### Power

PS/2: 35mA @ 5V (from mouse Port)

USB: 35mA @5V (from USB port)

### Temperature Range

Operating: -40C to +70C (-40F to +158F)

Storage: -40C to +90C (-40F to +194F)

### Humidity

100% Humidity Resistant when properly installed

### Shock

3x11 ms pulses of 50g on each of 3 axes

### Vibration

Power Spectral Density: 0.04g/Hz, Frequency Range: 20Hz-2kHz,

Duration of Test per Axis: 3 hours

### Dimensions

(W-H-D) 4.33" x 2.25" x 1.0" (109.9mm x 57.2mm x 25.4mm)

### Cable

Length: 10 feet (3.94 meters), Interface: Either PS/2 or USB single connection

### Compatibility

PS/2: All windows operating systems most Linux/Unix Systems,

USB: All windows operating systems, MAC OS and most Linux/Unix Systems

### Warranty

1 Year limited Warranty Standard

### Model Numbers

1330-FTM-PM-USB (USB Interface)

1330-FTM-PM-PS/2 (PS/2 Interface)

### Disclaimer

Note: Specifications are subject to change without notice.